

带有台阶的预成型宽带排气管卡箍设计用于快速、方便和准确的安装。夹紧前无需分离管道或排气构件。

直径范围：2 “-6” (50.8mm-152.4mm)

材料：铝钢和光亮表面 304 不锈钢

带台阶的预成型带提供快速、准确的安装

The pre-formed wideband exhaust clamp with step is designed for fast, easy and accurate installation. There is no need to separate pipes or exhaust members before clamping.

Diameter Range: 2” -6” (50.8mm—152.4mm)

Materials: Aluminum steel and bright finish 304 stainless steel

Pre-formed band with step provides fast, accurate installation



尺寸 Dimension	
Inch	mm
2	51
2.25	57
2.5	64
2.75	70
3	76
3.5	89
4	101
4.5	114
5	127
6	152

不需要使用开槽管端的专用密封解决方案。


对于搭接和对接式接头连接，独特的密封性能易于快速准确安装

304 不锈钢直径范围 2 “-8W

Service-specific sealing solution that does not require the use of slotted pipe ends.

For Lap and Butt Style Joint Connections Unique Sealing Performance Easy, Fast Accurate Installation


304 Stainless Steel Diameter Range 2” -8W

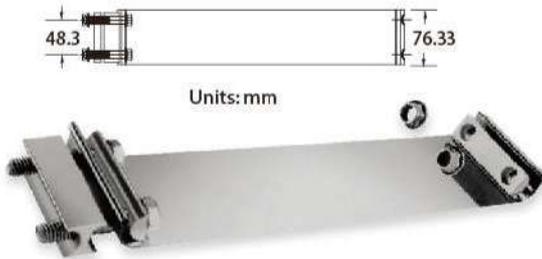

正常工作尺寸 Nominal Joint Dimension	
Inch	mm
2	50.8
2 1/4	57.2
2 1/2	63.5
2 3/4	69.9
3	76.2
3 1/2	88.9
4	101.6
4 1/2	114.3
5	127
6	152.4
7	177.8
8	203.2


开槽重叠式汽车排气系统的持久密封性能。对于开槽搭接连接，优越的夹具负载能力反应块技术直径范围 1 3/4 M-7 “

Durable sealing performance for slotted overlap joint automotive exhaust systems. For Slotted Lap Joint Connection Superior Clamp Load Capacity Reaction Block Technology Diameter Range 1 3/4 M-7 “

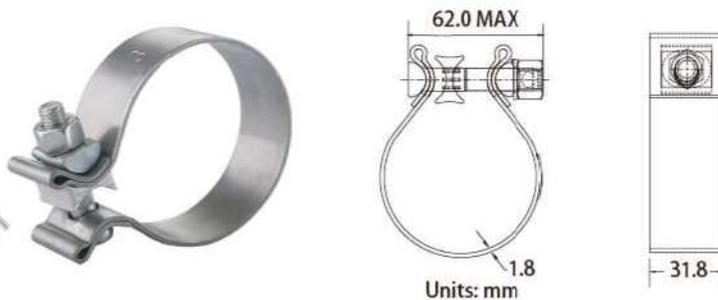

正常工作尺寸 Nominal Joint Dimension	
Inch	mm
1 3/4	44.5
2	50.8
2 1/4	57.2
2 1/2	63.5
2 3/4	69.9
3	76.2
3 1/2	88.9
4	101.6
4 1/2	114.3
5	127
6	152.4
7	177.8




T 型 V 槽卡箍
T-Bolt V Band Clamp

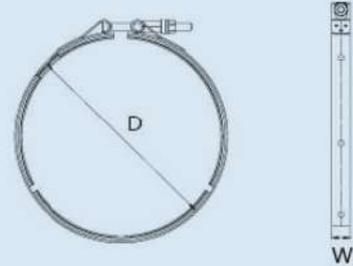

◎ 锁样式 / Latch Styles

名称 Name	图片 Pictures	功能介绍 Function introduction
T 型螺栓锁 T-Bolt latch		该种锁具用于永久或半永久应用中或安全加压系统中；该种锁具是我们最经济的一种锁具 This kind of lock is used in permanent or semi-permanent applications or safety pressurization systems; This kind of lock is our most economical one
快速释放锁 Quick release latch		该种锁具易于拆卸，并且可以按照要求用 T 型螺栓来替换 This quick release latch is used for ease of disassembly and is required where the ability to replace bolts is desired.
鞍座式快速释放锁 Saddle quick release latch		该种锁具也易于拆卸，也可以按照要求替换螺栓。由于耳轴 / 箍带的干扰，不建议用于直径大于 10" (254mm) The saddle quick release latch is also used for ease of disassembly and where the ability to replace bolts is desired. It is not recommended for diameters larger than 10 in. [254 mm] due to trunnion/band interference.
快速释放锁 Quick release latch		该种锁具也易于拆卸，也可以按照要求替换螺栓 This quick release latch is also used for ease of disassembly and where the ability to replace bolts is desired.



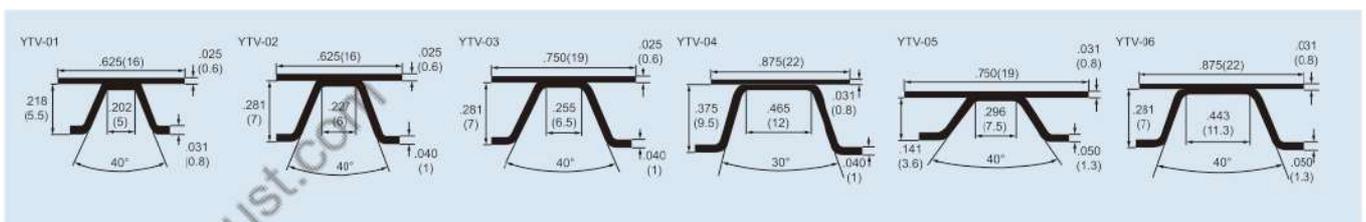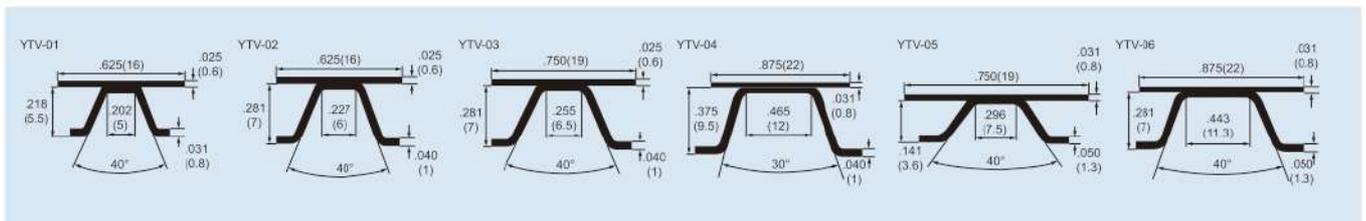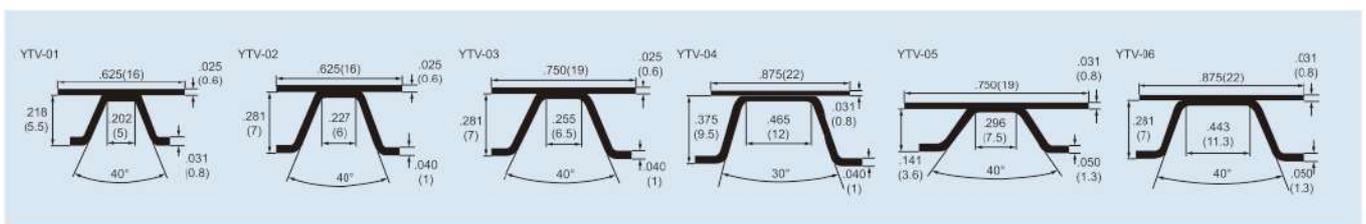

排气系统卡箍 Exhaust System Clamp

◎ 螺栓代号 / Bolt Code

编号 Code	螺纹尺寸 Thread Size	螺栓描述 Bolt Description	图片 Pictures
YDB1	10-32 1/4-28 M6X1 5/16-24 3/8-16 1/2-13	4037 合金热处理 125000-145000 psi 铁镀锌 4037 Alloy Heat Treated to 125,000 - 145,000 psi Zinc Plated	
YDB2	10-32 1/4-20 1/4-28 5/16-18 5/16-24 3/8-16 10-32	18-8 不锈钢 (302 或 305) 18-8 Stainless Steel (302 or 305)	
YDB3	1/4-28 5/16-24	不锈钢 431,420,410 热处理 140000-160000psi 431, 420 or 410 Stainless Steel Heat Treated to 140,000 to 160,000 psi	
YDB4	10-32 1/4-28	不锈钢 A286, 最小 130000 psi A286 Stainless Steel, 130,000 psi minimum	
YDB5	1/4-28 M6X1 M8X1.25	不锈钢 316 316 Stainless Steel	

◎ 旋钮代号 / Knob Code

编号 Code	螺栓描述 BoYD Description	图片 Pictures
YDK1	手紧旋钮, 塑料外壳, 黄铜插入件, 1" 长 (25.4mm) Knob for hand tightening, plastic with Brass insert, 1 in. long (25.4 mm)	
YDK2	手紧旋钮, 塑料外壳, 黄铜插入件, 1.75- 长 (44.5mm) Knob for hand tightening, plastic with Brass insert, 1.75 in. long (44.5 mm)	
YDK3	手紧旋钮, 钢, 镀铬或铁镀锌, 3" 长 (76.2mm) T-Handle for hand tightening, Steel, Cadmium or Zinc Plated, 3 in. long (76.2 mm)	

◎ 螺母代号 / Nut Code

编号 Code	功能介绍 Nut Description	温度等级 Temp Rating	是否自锁 Self-Locking	图片 Pictures
YDS1	钢, 自锁, 尼龙镶嵌, 镀铬或镀锌 Steel, self-locking, nylon insert, Cadmium or Zinc Plated	250° F (120° C)	Yes	
YDS2	全铁, 钢, 自锁, 短梁设计, 镀铬或镀锌 All metal, Steel, self-locking, collar or short beam design, Cadmium or Zinc Plated	550° F (290° C)	Yes	
YDS3	全铁, 18-8 不锈钢, 自锁, 短梁设计, 镀银 All metal, 18-8 Stainless Steel*, self-locking, collar or short beam design, Silver Plated	800° F (425° C)	Yes	
YDS4	全铁, 347 不锈钢, 自锁, 短梁设计, 镀银 All metal, 347 Stainless Steel*, self-locking, collar or short beam design, Silver Plated	1200° F (650° C)	Yes	
YDS5	18-8 不锈钢, 自锁, 尼龙镶嵌, 镀银 18-8 Stainless Steel, self-locking, nylon insert, Silver Plated	250° F (120° C)	Yes	
YDS6	不锈钢六角螺母, 镀银 Stainless Steel Hex Nut, Silver Plated	800° F (425° C)	No	
YDS7	钢六角螺母, 铁镀锌 Steel Hex Nut, Zinc Plated	--	No	

可根据客户要求提供更多尺寸和材质。以上数据仅供参考


More size and material can be supplied according to customers requirements. Above data just for reference.

排气系统卡箍 Exhaust System Clamp

预装配的密封性能和优越的夹具承载能力，无管道重叠。

对于对接接头式连接，15mm 最大间隙允许每个管道直径范围 3.5-44mm 的插入量 1 3/4-3 1/2M

Pre-assembled sealing performance and superior clamp load capacity without pipe overlap. For Butt Joint Style Connections 15mm Max Gap Allows 33.5-44mm Insertions per Pipe Diameter Range 1 3/4-3 1/2M



标称接头直径 Nominal Joint Diameter(管道外径 Pipe O.D.)	
Inch	mm
2 1/4	57
2 1/2	63
2 3/4	69
3	76
3 1/2	90


连接管 Exhaust Sleeve Connector

材料 Material: carbon steel/ SS304, 尺寸 ID: 38mm-89mm 长度 Length: 80-125mm



材质 Material	尺寸 Diameter	长 Length
304 & Carbon Steel	38mm-89mm	80mm-125mm

U 型卡箍 U-bolt Clamp

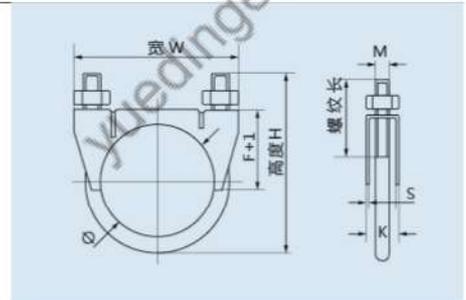

◎ 技术参数 / Technical Parameter

款式 Type	规格 / 型号 Size Ø	高度 Height H	宽度 Width W	螺纹长 Thread length L	F	M	K	S	螺母样式 Nut Size
A	36	63	63	25	28.5	M8	15	2	
	38	64	64	25	29				
	42	65	70	25	31				
	45	73	73	30	33				
	48	77	76	30	34				
	50	79	78	30	36				
	54	83	82	30	37				
	58	87	86	30	40				
	63.5	75	92	30	43				
	65	94	93	30	44				
B	70	95	100	40	43	M10	17 21	3	
	73	110	102	40	43				
	54	89	87	40	32				
	94	128	128	45	60				
	106	150	138	45	65				

可根据客户要求提供更多尺寸和材质。以上数据仅供参考

More size and material can be supplied according to customers requirements. Above data just for reference.

实心强力空心强力卡箍 Heavy Duty Hose Clamp



◎ 技术参数 / Technical Parameter

实心强力卡箍 Heavy Duty Hose Clamp With one Bolt		空心强力卡箍 Heavy Duty Hose Clamp With Hollow Shaft		带宽 Band Width (mm)	螺丝钉 Screw	厚 (Thickness)	
编号 Part No.	规格 Size(inm)	编号 Part No.	规格 Size(inm)			W1(mm)	W4(mm)
YDSX19	17-19	YDKX19	17-19	18	M5*40	0.6	0.6
YDSX21	19-21	YDKX21	19-21				
YDSX22	20-22	YDKX22	20-22				
YDSX23	21-23	YDKX23	21-23				
YDSX25	23-25	YDKX25	23-25				
YDSX28	26-28	YDKX28	26-28				
YDSX31	29-31	YDKX31	29-31	20	M6*50	0.8	0.8
YDSX35	32-35	YDKX35	32-35				
YDSX39	36-39	YDKX39	36-39				
YDSX41	38-41	YDKX41	38-41				
YDSX43	40-43	YDKX43	40-43				
YDSX46	43-46	YDKX46	43-46				
YDSX47	44-47	YDKX47	44-47	22	M6*55	1.2	0.8
YDSX51	48-51	YDKX51	48-51				
YDSX55	52-55	YDKX55	52-55				
YDSX59	56-59	YDKX59	56-59				
YDSX63	60-63	YDKX63	60-63				
YDSX67	64-67	YDKX67	64-67				
YDSX73	68-73	YDKX73	68-73	24	M8*70	1.5	0.8
YDSX79	74-79	YDKX79	74-79				
YDSX80	76-80	YDKX80	76-80				
YDSX85	80-85	YDKX85	80-85				
YDSX91	86-91	YDKX91	86-91				
YDSX97	92-97	YDKX97	92-97				
YDSX103	98-103	YDKX103	98-103	26	M10*110	1.7	1
YDSX112	104-112	YDKX112	104-112				
YDSX121	113-121	YDKX121	113-121				
YDSX130	122-130	YDKX130	122-130				
YDSX139	131-139	YDKX139	131-139				
YDSX148	140-148	YDKX148	140-148				
YDSX161	149-161	YDKX161	149-161	26	M10*110	1.7	1
YDSX174	162-174	YDKX174	162-174				
YDSX187	175-187	YDKX187	175-187				
YDSX200	188-200	YDKX200	188-200				
YDSX213	201-213	YDKX213	201-213				
YDSX226	214-226	YDKX226	214-226				
YDSX239	227-239	YDKX239	227-239	26	M10*110	1.7	1
YDSX252	240-252	YDKX252	240-252				

材质 Material	钢带 Band	舌板 Bridge	轴 Trunnion	螺栓 Bolt	建议安装扭力 Suggested Install Torque
W1	Zinc Plated Steel	Zinc Plated Steel	Zinc Plated Steel	Zinc Plated Steel	Ø ≤ 28 4.5Nm
W4	AISISS301/SS304	AISISS301/SS304	AISISS301/SS304	A2-70	Ø ≤ 67 9Nm
W5	AISI SS316	AISI SS316	AISI SS316	A2-70	Ø ≤ 130 18Nm
					Ø ≤ 252 29Nm


老虎夹
Spiral Bolt Hose Clamp



◎ 技术参数 / Technical Parameter

规格 Size	带厚 Band Thickness(mm)	螺栓直径 Bolt Diameter(mm)
1	33	6
1.2	40	6
1.5	48	6
2	62	6
2.2	70	6
2.5	78	8
3	93	8
3.5	105	8
4	116	8
4.5	130	8
5	143	8
5.5	155	8
6	167	10
6.5	187	10
8	220	10
8.5	245	10
10	280	10
10.5	300	10
12	330	10

双头强力喉箍
Double Bolts Power Clamp

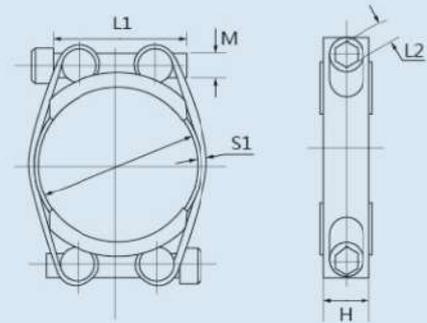

◎ 技术参数 / Technical Parameter

双头强力喉箍 Double Bolts and Double Band Super Clamps				
编号 Part No.	尺寸范围 Dimension Range (mm)	带宽 Bandwidth(mm)	带宽厚度 Band Thickness(mm)	螺丝钉 Screw
YDST40	30-40	20	1.0	M6*45
YDST45	35-45	20	1.0	M6*45
YDST50	40-50	20	1.0	M6*45
YDST55	45-55	20	1.0	M6*45
YDST60	50-60	20	1.0	M6*45
YDST65	55-65	20	1.0	M6*45
YDST70	60-70	20	1.0	M6*45
YDST75	65-75	20	1.0	M6*45
YDST80	70-80	20	1.0	M6*45
YDST85	75-85	24	1.2	M8*60
YDST90	80-90	24	1.2	M8*60
YDST95	85-95	24	1.2	M8*60
YDST100	90-100	24	1.2	M8*60
YDST105	95-105	24	1.2	M8*60
YDST110	100-110	24	1.2	M8*60
YDST115	105-115	24	1.2	M8*60
YDST120	110-120	24	1.2	M8*60
YDST130	120-130	24	1.2	M8*60
YDST135	125-135	24	1.2	M8*60
YDST140	130-140	24	1.2	M8*60
YDST145	135-145	24	1.2	M8*60
YDST150	140-150	24	1.2	M8*60
YDST155	145-155	24	1.2	M8*60
YDST160	150-160	24	1.2	M8*60
YDST165	155-165	24	1.2	M8*60
YDST170	160-170	24	1.2	M8*60
YDST175	165-175	24	1.2	M8*60
YDST180	170-180	24	1.2	M8*60
YDST190	180-190	24	1.2	M8*60
YDST200	190-200	24	1.2	M8*60
YDST210	200-210	24	1.2	M8*60
YDST220	210-220	24	1.2	M8*60
YDST230	220-230	24	1.2	M8*60
YDST240	230-240	24	1.2	M8*60
YDST250	240-250	24	1.2	M8*60
YDST260	250-260	24	1.2	M8*60
YDST270	260-270	24	1.2	M8*60
YDST280	270-280	24	1.2	M8*60
YDST290	280-290	24	1.2	M8*60
YDST30	290-300	24	1.2	M8*60

材质 Material	钢带 Band	舌板 Bridge	轴 Trunnion	螺栓 Bolt	建议安装扭力 Suggested Install Torque
W1	Zinc Plated Steel	Zinc Plated Steel	Zinc Plated Steel	Zinc Plated Steel	$\varnothing \leq 28$ 4.5Nm
W4	AISISS301/SS304	AISISS301/SS304	AISISS301/SS304	A2-70	$\varnothing \leq 67$ 9Nm
W5	AISI SS316	AISI SS316	AISI SS316	A2-70	$\varnothing \leq 130$ 18Nm
					$\varnothing \leq 252$ 29Nm

可根据客户要求提供更多尺寸和材质。以上数据仅供参考

More size and material can be supplied according to customers requirements. Above data just for reference.

无耳无极卡箍 Low Profile Clamp



◎ 技术参数 / Technical Parameter

编号 Part No.	正常情况尺寸 Normal Situation Dimension (mm)	工作情况尺寸 Working Situation Dimension (mm)
64.4-706R	64.4	60
64.9-706R	64.9	60.5
65.4-706R	65.4	61
65.9-706R	65.9	61.5
66.4-706R	66.4	62
...
...
112.4-706R	112.4	108
112.9-706R	112.9	108.5
113.4-706R	113.4	109
113.9-706R	113.9	109.5
114.4-706R	114.4	110

编号 Part No.	正常情况尺寸 Normal Situation Dimension (mm)	工作情况尺寸 Working Situation Dimension (mm)
22.0-906R	22	19.5
22.5-906R	22.5	20
23.0-906R	23	20.5
23.5-906R	23.5	21
24.0-906R	24	21.5
...
...
110.5-906R	110.5	108
111.0-906R	111	108.5
111.5-906R	111.5	109
112.0-906R	112	109.5
112.5-906R	112.5	110

注：带宽 7 毫米，带厚 6 毫米 (706R)，直径范围 66.9 毫米至 111.9 毫米，卡箍每 0.5 毫米一个规格按要求提供
带宽 9 毫米，带厚 6 毫米 (906R)，直径范围 24.5 毫米至 110 毫米，卡箍每 0.5 毫米一个规格按要求提供

Note: Band 7mm, thickness 6mm—706R Demention range from 66.9mm to 111.9mm, clamps can be supplied per 0.5mm.
Band 9mm, thickness 6mm—906R Demention range from 24.5mm to 110mm, clamps can be supplied per 0.5mm.

单耳、双耳、迷你、弹簧、CLIC 卡箍
Ear, low profile, 2-ear, mini, spring, clic clamp

双耳卡箍
2-Ear Clamp



◎ 技术参数 / Technical Parameter

编号 Part No.	尺寸 Dimension (mm)	带厚 Band Thickness	编号 Part No.	尺寸 Dimension (mm)	带厚 Band Thickness
YDSR07	5-7	6 ±0.2	YDSR27	23-27	9 ±0.2
YDSR09	7-9	7 ±0.2	YDSR28	25-28	9 ±0.2
YDSR11	9-11	7 ±0.2	YDSR31	28-31	9.5 ±0.2
YDSR13	11-13	7 ±0.2	YDSR34	31-34	9.5 ±0.2
YDSR15	13-15	7.5 ±0.2	YDSR37	34-37	9.5 ±0.2
YDSR18	15-18	7.5 ±0.2	YDSR40	37-40	10 ±0.2
YDSR20	17-20	7.5 ±0.2	YDSR43	41-43	10 ±0.2
YDSR23	20-23	9 ±0.2	YDSR46	43-46	10 ±0.2
YDSR25	21-25	9 ±0.2			

迷你卡箍
Mini Clamp




◎ 技术参数 / Technical Parameter

编号 Part No.	尺寸 Dimension (mm)	带厚 Band Thickness	编号 Part No.	尺寸 Dimension (mm)	带厚 Band Thickness
YDSR08	6-8	0.6	YDSR22	20-22	0.7
YDSR09	7-9	0.6	YDSR23	21-23	0.7
YDSR10	8-10	0.6	YDSR24	22-24	0.7
YDSR11	9-11	0.6	YDSR25	23-25	0.7
YDSR12	10-12	0.6	YDSR26	24-26	0.7
YDSR13	11-13	0.6	YDSR27	25-27	0.7
YDSR14	12-14	0.6	YDSR28	26-28	0.7
YDSR15	13-15	0.6	YDSR29	27-29	0.7
YDSR16	14-16	0.6	YDSR30	28-30	0.7
YDSR17	15-17	0.6	YDSR31	29-31	0.7
YDSR18	16-18	0.6	YDSR32	30-32	0.7
YDSR19	17-19	0.6	YDSR33	31-33	0.7
YDSR20	18-20	0.6	YDSR34	32-34	0.7
YDSR21	19-21	0.6	YDSR48	46-48	0.7

可根据客户要求提供更多尺寸和材质。以上数据仅供参考

More size and material can be supplied according to customers requirements. Above data just for reference.

弹簧卡箍 Spring Clamp

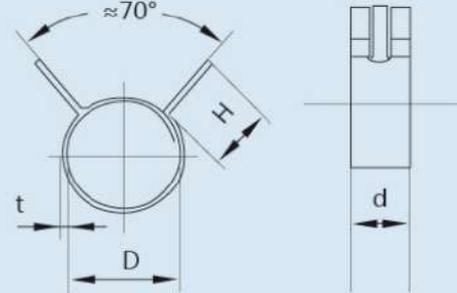

弹簧卡箍 Spring clamp


◎ 技术参数 / Technical Parameter

编号 Part No.	D (mm)	S (mm)	B (mm)	D1 (mm)	D2 (mm)	编号 Part No.	D (mm)	S (mm)	B (mm)	D1 (mm)	D2 (mm)
YDSR7.0	7.0	0.6	6.0	7.6	8.3	YDSR15.5	15.5	1.0	10.0	16.7	18.4
YDSR8.0	8.0			8.6	9.5	YDSR16.0	16.0			17.3	19.1
YDSR8.5	8.5			9.2	10.2	YDSR16.5	16.5			17.9	19.7
YDSR9.0	9.0			9.7	10.7	YDSR17.0	17.0			18.4	20.2
YDSR9.5	9.5	10.3	11.3	YDSR17.5	17.5	18.9	20.9				
YDSR10.0	10.0	10.8	11.9	YDSR18.0	18.0	19.4	21.4				
YDSR10.5	10.5	11.4	12.5	YDSR18.5	18.5	20.0	22.1				
YDSR11.0	11.0	11.9	13.1	YDSR19.0	19.0	20.5	22.6				
YDSR11.5	11.5	12.4	13.7	YDSR19.5	19.5	21.1	23.3				
YDSR12.0	12.0	13.0	14.3	YDSR20.0	20.0	21.6	23.8				
YDSR12.5	12.5	13.5	14.9	YDSR20.5	20.5	22.2	24.4				
YDSR13.0	13.0	14.0	15.5	YDSR21.0	21.0	22.7	25.0				
YDSR13.5	13.5	14.5	16.1	YDSR23.0	23.0	24.8	27.4				
YDSR14.0	14.0	15.1	16.7	YDSR24.0	24.0	25.9	28.5				
YDSR14.5	14.5	15.7	17.3	YDSR25.0	25	27.0	29.8				
YDSR15.0	15.0	1.0	10.0	16.2	17.0						



单耳、双耳、迷你、弹簧、CLIC 卡箍
 Ear, low profile, 2-ear, mini, spring, clic clamp

CLIC

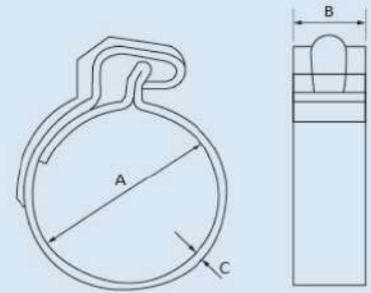


◎ 技术参数 / Technical Parameter

编号 Part No.	直径 Diameter(Inch)	直径 Diameter(mm)	带宽 Band Width	带厚 Band Thickness	
8	0.33-0.37	8.38-9.40	5.8	0.5	
8.5	0.35-0.41	8.89-10.41			
9	0.37-0.43	9.40-10.92			
9.5	0.39-0.45	9.91-11.43			
10	0.41-0.47	10.41-11.94			
10.5	0.43-0.49	10.92-12.45			
11	0.45-0.51	11.43-12.95			
11.5	0.47-0.53	11.94-13.46			
12	0.49-0.55	12.45-13.97			
12.5	0.51-0.55	12.95-13.97			
13	0.53-0.59	13.46-14.99			
13.5	0.55-0.60	13.97-15.24			
14	0.57-0.62	14.48-15.75			7.8
14.5	0.59-0.64	14.99-16.26			
15	0.60-0.66	15.24-16.76			
15.5	0.62-0.68	15.75-17.27			
16	0.64-0.70	16.26-17.78			
16.5	0.66-0.72	16.76-18.29			
17	0.68-0.74	17.27-18.80			
17.5	0.70-0.76	17.78-19.30			
18	0.72-0.76	18.29-19.30			
18.5	0.74-0.80	18.80-20.32			
19	0.76-0.82	19.30-20.83			
19.5	0.78-0.84	19.81-21.34			
20	0.80-0.86	20.32-21.84			
20.5	0.82-0.90	20.83-22.86			
21	0.84-0.92	21.34-23.37			
21.5	0.86-0.94	21.84-23.88			
22	0.88-0.96	22.35-24.38			
23	0.92-0.99	23.37-25.15			
23.5	0.94-1.01	23.88-25.65			

可根据客户要求提供更多尺寸和材质。以上数据仅供参考

More size and material can be supplied according to customers requirements. Above data just for reference.


双钢丝卡箍 Double Wire Hose Clamp

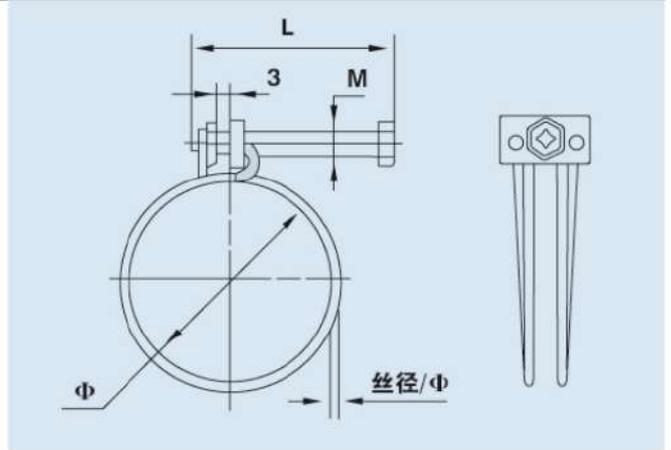

© 技术参数 / Technical Parameter

双钢丝卡箍 Wire Hose Clamp						
规格编号 Size No. Q672	规格 Size		丝径 Wire Diameter(mm)	螺钉尺寸 Screw		
	Inch	mm				
14	7/16-9/16	11-14	1.2	M5*35		
16	1/2-5/8	13-16				
18	9/16-11/16	15-18				
20	11/16-13/16	17-20				
22	6/8-7/8	19-22				
24	13/16-15/16	20-24				
26	7/8-1	22-26	1.8	M5*35		
28	15/16-11/8	24-28				
30	1-13/16	26-30				
32	1 1/8-1 1/4	28-32				
35	1 1/4-1 3/8	31-35				
38	1 5/16-1 1/2	34-38				
40	1 3/8-1 9/16	35-40	2.2	M6*50		
42	1 7/16-1 5/8	37-42				
45	1 9/16-1 3/4	40-45				
48	1 11/16-1 7/8	43-48				
50	1 3/4-2	45-50				
52	1 7/8-2 1/16	47-52				
55	2-2 3/16	50-55				
58	2 1/16-2 1/4	53-58				
60	2 3/16-2 3/8	55-60				
62	2 1/8-2 7/16	54-62				
65	2 3/8-2 9/16	60-65			2.5	M8*70
68	2 1/2-2 11/16	63-68				
70	2 9/16-2 3/4	65-70				
75	2 3/4-2 15/16	70-75				
80	2 15/16-3 1/8	75-80				
85	3 1/8-3 3/8	80-85				
90	3 5/16-3 9/16	84-90				
95	3 1/2-3 3/4	89-95				
100	3 11/16-3 15/16	94-100				
105	3 7/8-4 1/8	98-105				
110	4 1/16-4 5/16	103-110				
115	4 1/4-4 1/2	108-115				
120	4 7/16-4 3/4	113-120				

连胶条
Fixing Clamp

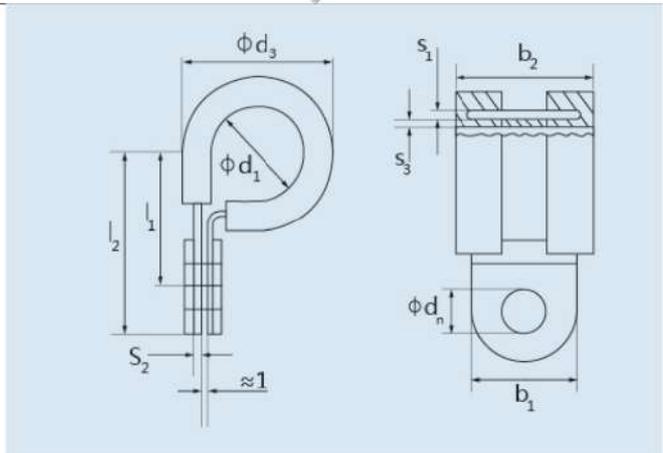

◎ 技术参数 / Technical Parameter

规格 Size(d1)	带宽 Band Width(b1)				
mm	9mm	12mm	15mm	20mm	25mm
4	R0904	R1204	/	/	/
6	R0906	R1206	R1506	/	/
8	R0908	R1208	R1508	/	/
10	R0910	R1210	R1510	/	/
12	R0912	R1212	R1512	/	/
14	R0914	R1214	R1514	R2014	R2514
16	R0916	R1216	R1516	R2016	R2516
18	R0918	R1218	R1518	R2018	R2518
20	R0920	R1220	R1520	R2020	R2520
22	R0922	R1222	R1522	R2022	R2522
24	R0924	R1224	R1524	R2024	R2524
26	R0926	R1226	R1526	R2026	R2526
28	R0928	R1228	R1528	R2028	R2528
30	R0930	R1230	R1530	R2030	R2530
32	/	/	R1532	R2032	R2532
34	/	/	R1534	R2034	R2534
36	/	/	R1536	R2036	R2536
38	/	/	R1538	R2038	R2538
40	/	/	R1540	R2040	R2540
42	/	/	R1542	R2042	R2542
44	/	/	R1544	R2044	R2544
46	/	/	R1546	R2046	R2546
48	/	/	/	R2048	R2548
50	/	/	/	R2050	R2550
54	/	/	/	R2054	R2554
56	/	/	/	R2056	R2556

ϕd_1	$b_1 \pm 0.3$	b_2	d_n	d_3		$l_1 \pm 1-0.2$		$l_2 \max$		$S_1 W_1 w_4 w_5$		$S_2 W_1 w_4 w_5$		$S_3 \pm 0.3$			
4 to 30	9	13 ± 0.8	4.3	$d_1 \pm$	5.2	$d_1 \pm$	4.7	$d_1/2+$	9.2	0.4		1.4		1			
4 to 30	12	15 ± 0.8	5.3		5.8				6.8	13	0.5		1.5		1.2		
6 to 14	15	19 ± 1.0	6.4		7.4				9.7	17.2	0.6		1.6		1.5		
16 to 46					20				26 ± 1.0	6.4	9	22.5	0.8			2.3	
14 to 24													1	0.8		2.5	2.3
14 to 54	25	31 ± 1.0	10.5	13	14.5	27	1		2.5		3						
50 to 150							1.2	1	2.7	2.5							


可根据客户要求提供更多尺寸和材质。以上数据仅供参考

More size and material can be supplied according to customers requirements. Above data just for reference.

单耳卡箍 Ear Clamp (SS304)

◎ 技术参数 / Technical Parameter

编号 Part No.	尺寸 Dimension(mm)	编号 Part No.	尺寸 Dimension(mm)	编号 Part No.	尺寸 Dimension(mm)
29.0-1008R	25.8-29.0	62.0-1010R	58.8-62.0	91.5-1010R	88.3-91.5
29.5-1008R	26.3-29.5	63.5-1010R	60.3-63.5	92.0-1010R	88.2-92.0
30.5-1008R	27.3-30.5	65.0-1010R	61.8-65.0	92.5-1010R	89.3-92.5
31.0-1008R	27.8-31.0	65.5-1010R	62.3-65.5	93.0-1010R	89.8-93.0
31.5-1008R	28.3-31.5	66.5-1010R	63.3-66.5	93.5-1010R	90.3-93.5
32.0-1008R	28.8-32.0	68.0-1010R	64.8-68.0	94.0-1010R	90.8-94.0
32.5-1008R	29.3-32.5	69.0-1010R	65.8-69.0	95.0-1010R	91.8-95.0
33.0-1008R	29.8-33.0	69.5-1010R	66.3-69.5	95.5-1010R	92.3-95.5
33.5-1008R	30.3-33.5	71.0-1010R	67.8-71.0	96.0-1010R	92.8-96.0
34.0-1008R	30.8-34.0	72.5-1010R	69.3-72.5	96.5-1010R	93.3-96.5
34.5-1008R	31.3-34.5	74.0-1010R	70.8-74.0	97.5-1010R	94.3-97.5
35.0-1008R	31.8-35.0	75.5-1010R	72.3-75.5	98.0-1010R	94.8-98.0
36.0-1008R	32.8-36.0	77.0-1010R	73.8-77.0	98.5-1010R	95.3-98.5
36.5-1008R	33.3-36.5	78.5-1010R	75.3-78.5	99.5-1010R	96.3-99.5
37.0-1008R	33.8-37.0	80.0-1010R	76.8-80.0	101.0-1010R	97.8-101.0
38.0-1008R	34.8-38.0	81.5-1010R	78.3-81.5	102.0-1010R	98.8-102.0
39.5-1008R	36.8-39.5	82.0-1010R	78.8-82.0	102.5-1010R	99.3-102.5
40.0-1008R	36.8-40.0	83.0-1010R	79.8-83.0	104.0-1010R	100.8-104.0
41.0-1008R	37.8-41.0	83.5-1010R	80.3-83.5	105.5-1010R	102.3-105.5
42.5-1008R	39.3-42.5	84.0-1010R	80.8-84.0	107.0-1010R	103.8-107.0
43.0-1008R	39.8-43.0	84.5-1010R	81.3-84.5	108.5-1010R	105.5-108.5
44.0-1008R	40.8-44.0	85.0-1010R	81.3-85.0	110.0-1010R	106.8-110.0
45.5-1008R	42.3-45.5	85.5-1010R	82.3-85.5	111.5-1010R	108.3-111.5
47.0-1008R	43.8-47.0	86.0-1010R	82.8-86.0	113.0-1010R	109.8-113.0
48.5-1008R	45.3-48.5	86.5-1010R	83.3-86.5	114.5-1010R	111.3-114.5
50.0-1008R	46.8-50.0	87.5-1010R	84.3-87.5	115.0-1010R	111.8-115.0
51.5-1008R	48.3-51.5	88.0-1010R	84.8-88.0	116.0-1010R	112.8-116.0
53.0-1008R	49.8-53.0	89.0-1010R	85.8-89.0	117.5-1010R	114.3-117.5
54.5-1008R	51.3-54.5	90.0-1010R	86.8-90.0	119.0-1010R	115.8-119.0
56.0-1008R	52.8-56.0	90.5-1010R	87.3-90.5	120.5-1010R	117.3-120.5
57.5-1008R	54.3-57.5	91.0-1010R	87.8-91.0	121.5-1010R	118.3-121.5
59.0-1008R	55.8-59.0	/	/	/	/
60.5-1008R	55.3-60.5	/	/	/	/



编号 Part No.	尺寸范围 Dimension Range	材质 Material	带宽 Band Width	带厚 Band Thickness
A045	25.0~45.0mm	不锈钢 Stainless Steel AISI304	7mm	0.6mm
A120	60.0-120mm	不锈钢 Stainless Steel AISI 304	7mm	0.6mm




可根据客户要求提供更多尺寸和材质。以上数据仅供参考

More size and material can be supplied according to customers requirements. Above data just for reference.

单耳、双耳、迷你、弹簧、CLIC 卡箍
 Ear, low profile, 2-ear, mini, spring, clic clamp

单耳卡箍
 Ear Clamp (SS304)

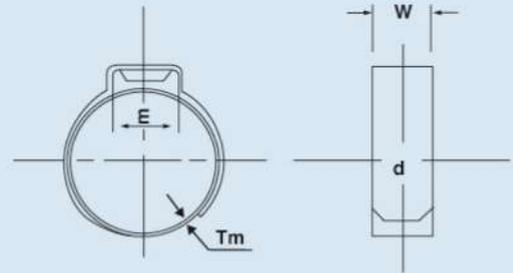


◎ 技术参数 / Technical Parameter

编号 Part No.	尺寸 Dimension(mm)	编号 Part No.	尺寸 Dimension(mm)	编号 Part No.	尺寸 Dimension(mm)
6.5-505R	5.5-6.5	22.6-706R	19.4-22.6	66.5-706R	63.3-66.5
7.0-505R	5.8-7.0	23.5-706R	20.3-23.5	68.0-706R	64.8-68.0
8.0-505R	6.8-8.0	24.1-706R	20.9-24.1	69.5-706R	66.3-69.5
8.7-505R	7.0-8.7	25.6-706R	22.4-25.6	71.0-706R	67.8-71.0
9.0-505R	7.3-9.0	27.1-706R	23.9-27.1	72.5-706R	69.3-72.5
9.5-505R	7.8-9.5	28.6-706R	25.4-28.6	74.0-706R	70.8-74.0
10.0-505R	8.3-10.0	30.1-706R	26.9-30.1	75.5-706R	72.3-75.5
10.5-505R	8.8-10.5	30.8-706R	27.6-30.8	77.0-706R	73.8-77.0
10.9-505R	9.2-10.9	31.8-706R	28.4-31.6	78.5-706R	75.3-78.5
11.3-505R	9.6-11.3	33.1-706R	29.9-33.1	80.0-706R	76.8-80.0
11.8-505R	10.1-11.8	34.6-706R	31.4-34.6	81.5-706R	78.3-81.5
11.9-706R	9.4-11.9	36.1-706R	32.9-36.1	83.0-706R	79.8-83.0
12.3-706R	9.8-12.3	37.6-706R	34.4-37.6	84.5-706R	81.3-84.5
12.8-706R	10.3-12.8	38.1-706R	34.9-38.1	86.0-706R	82.8-86.0
13.3-706R	10.8-13.3	39.6-706R	36.4-39.6	87.5-706R	84.3-87.5
13.8-706R	11.3-13.8	41.0-706R	37.8-41.0	89.0-706R	85.8-89.0
14.0-706R	11.5-14.0	42.5-706R	39.3-42.5	90.5-706R	87.3-90.5
14.5-706R	12.0-14.5	44.0-706R	40.8-44.0	92.0-706R	88.8-92.0
14.8-706R	12.3-14.8	45.5-706R	42.3-45.5	93.5-706R	90.3-93.5
15.3-706R	12.8-15.3	47.0-706R	43.8-47.0	95.0-706R	91.8-95.0
15.7-706R	13.2-15.7	48.5-706R	45.3-48.5	96.5-706R	93.3-96.5
16.2-706R	13.7-16.2	50.0-706R	46.8-50.0	98.0-706R	94.8-98.0
16.6-706R	14.1-16.6	51.5-706R	48.3-51.5	99.5-706R	96.3-99.5
16.8-706R	14.3-16.8	53.0-706R	49.8-53.0	101.0-706R	97.8-101.0
17.0-706R	14.5-17.0	54.5-706R	51.3-54.5	102.5-706R	99.3-102.5
17.8-706R	14.6-17.8	56.0-706R	52.8-56.0	104.0-706R	100.8-104.0
18.0-706R	14.8-18.0	57.5-706R	54.3-57.5	105.5-706R	102.3-105.5
18.5-706R	15.3-18.5	59.0-706R	56.8-59.0	108.5-706R	105.3-108.5
19.2-706R	18.0-19.2	60.5-706R	57.3-60.5	110.0-706R	106.8-110.0
19.8-706R	16.5-19.8	62.0-706R	58.8-62.0	111.5-706R	108.3-111.5
21.0-706R	17.5-21.0	63.5-706R	60.3-63.5	113.0-706R	109.8-113.0



T 型卡箍 / T 型弹簧卡箍 T-Bolt Hose Clamp/T-Bolt Spring Loaded Clamp

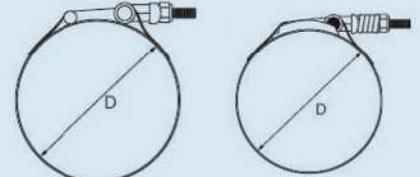

T 型卡箍
T-Bolt Hose Clamp

T 型弹簧卡箍
T-Bolt Spring Loaded Clamp

◎ 技术参数 / Technical Parameter

T 型卡箍 T-Clamp			T 型弹簧卡箍 T-type spring clamp			T 型重型弹簧卡箍 T-type heavy spring clamp	
SAE No.	规格 Size		SAE No.	规格 Size		规格 Size	
	Inch	mm		Inch	mm	Inch	mm
/	1 1/4-1 7/16	32-37	/	/	/	2 1/8-2 7/16	54-62
/	1 3/8-1 9/16	35-40	/	/	/	2 1/4-2 9/16	57-65
/	1 1/2-1 11/16	38-43	/	/	/	2 1/8-2 11/16	60-68
/	1 5/8-1 7/8	41-46	/	/	/	2 1/2-2 13/16	64-72
28	1 3/4-2	44-52	/	/	/	2 5/8-2 15/16	67-75
30	1 13/16-2 1/16	46-54	/	/	/	2 3/4-3 1/16	70-78
34	1 15/16-2 1/4	50-58	34	1 15/16-2 1/4	50-58	2 7/8-3 3/16	73-81
40	2 1/8-2 7/16	54-62	40	2 1/8-2 7/16	54-62	3-3 5/16	76-84
46	2 5/16-2 5/8	59-67	46	2 5/16-2 5/8	59-67	3 1/16-3 3/8	78-86
52	2 1/2-2 13/16	64-72	52	2 1/2-2 13/16	64-72	3 1/8-3 7/16	80-87
58	2 11/16-3	69-77	58	2 11/16-3	69-77	3 1/4-3 9/16	83-91
64	2 7/8-3 3/16	73-81	64	2 7/8-3 3/16	73-81	3 3/8-3 11/16	86-94
70	3 1/16-3 3/8	78-86	70	3 1/16-3 3/8	78-86	3 1/2-3 13/16	89-97
76	3 1/4-3 9/16	83-91	76	3 1/4-3 9/16	83-91	3 9/16-3 7/8	91-98
82	3 7/16-3 3/4	88-96	82	3 7/16-3 3/4	88-96	3 5/8-3 15/16	92-100
88	3 5/8-3 15/16	92-100	88	3 5/8-3 15/16	92-100	3 3/4-4 1/16	95-103
94	3 13/16-4 1/8	97-105	94	3 13/16-4 1/8	97-105	4 1/16-4 3/8	103-111
100	4-4 5/16	102-110	100	4-4 5/16	102-110	4 1/8-4 7/16	105-122
108	4 1/4-4 9/16	108-116	108	4 1/4-4 9/16	108-116	4 1/2-4 9/16	108-116
116	4 1/2-4 13/16	114-122	116	4 1/2-4 13/16	114-122	4 1/2-4 13/16	114-122
124	4 3/4-5 1/16	121-129	124	4 3/4-5 1/16	121-129	4 9/16-4 7/8	116-124
132	5-5 5/16	127-135	132	5-5 5/16	127-135	5-5 5/16	127-135
140	5 1/4-5 9/16	134-142	140	5 1/4-5 9/16	134-142	5 1/4-5 9/16	133-141
148	5 1/2-5 13/16	140-148	148	5 1/2-5 13/16	140-148	5 1/2-5 13/16	140-148
156	5 3/4-6 1/16	146-154	156	5 3/4-6 1/16	146-154	5 3/4-6 1/16	146-154
164	6-6 5/16	153-161	164	6-6 5/16	153-161	6-6 5/16	152-160
172	6 1/4-6 9/16	159-167	172	6 1/4-6 9/16	159-167	6 1/4-6 9/16	159-167
180	6 1/2-6 13/16	165-173	180	6 1/2-6 13/16	165-173	6 1/2-6 13/16	165-173

带宽 Band width mm	材质 Material	钢带 Band	舌板 Bridge	三通管 Trunnion	三通帽 Cap	弹簧 Spring	螺栓 Bolt	螺母 Nut	建议安装扭力 Suggested Install Torque
19	W2	AISISS301/ SS304	AISISS301/ SS304	AISISS301/ SS304	AISISS304	Zinc Plated Steel	镀锌钢 Zinc Plated Steel	镀锌钢 Zinc Plated Steel	9Nm
19	W4	AISISS301/ SS304	AISISS301/ SS304	AISISS301/ SS304	AISISS304	/	AISISS304	AISISS304	

可根据客户要求提供更多尺寸和材质。以上数据仅供参考

More size and material can be supplied according to customers requirements. Above data just for reference.

不锈钢扎带
Throbbing Clamp




◎ 技术参数 / Technical Parameter

不锈钢扎带 Throbbing Clamps					
编号 Part No.	尺寸 Dimension(mm)	尺寸 Dimension(inch)	带宽 Band Width	带宽 Band Width	带宽 Band Width
YDZD32	32	1 1/4"	6.3	15	/
YDZD35	35	1 3/8"	6.3	15	/
YDZD38	38	1 1/2"	6.3	15	/
YDZD44	44	1 3/4"	6.3	15	/
YDZD51	51	2"	6.3	15	19
YDZD57	57	2 1/4"	6.3	15	19
YDZD64	64	2 1/2"	/	15	19
YDZD70	70	2 3/4"	/	15	19
YDZD76	76	3"	/	15	19
YDZD89	89	3 1/2"	/	15	19
YDZD102	102	4"	/	15	19
YDZD114	114	4 1/2"	/	15	19
YDZD127	127	5"	/	15	19
YDZD152	152	6"	/	15	19
YDZD178	178	7"	/	15	19
YDZD203	203	8"	/	15	19

可根据客户要求提供更多尺寸和材质。以上数据仅供参考

More size and material can be supplied according to customers requirements. Above data just for reference.

德式喉箍 Germany Hose Clamp

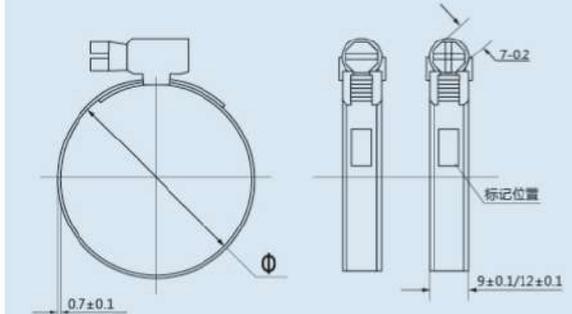


◎ 技术参数 / Technical Parameter

带宽 12mm 货号 Item no.		紧固范围 Range mm Q675	紧固范围 Range mm DIN3017	螺丝长度 screw Lenght mm	带宽 12mm 货号 Item no.		紧固范围 Range mm Q675	紧固范围 Range mm DIN3017	螺丝长度 screw Lenght mm
W1 W2	W4 W5				W1 W2	W4 W5			
YDDS/09B0812	YDDS/09Q0812	8-12	8-12	23	/	/	/	/	/
YDDS/09B1016	YDDS/09Q1016	10-16	10-16	23	/	/	/	/	/
YDDS/09B1222	YDDS/09Q1222	12-22	12-22	23	YDDS/12B1220	YDDS/12Q1220	12-22	12-22	23
YDDS/09B1627	YDDS/09Q1627	16-27	16-27	23	YDDS/12B1625	YDDS/12Q1625	16-27	16-27	23
YDDS/09B2032	YDDS/09Q2032	23-35	20-32	23	YDDS/12B2032	YDDS/12Q2032	23-35	20-32	23
YDDS/09B2540	YDDS/09Q2540	25-40	25-40	26	YDDS/12B2540	YDDS/12Q2540	30-45	25-40	26
YDDS/09B3250	YDDS/09Q3250	32-50	30-45 35-50	26	YDDS/12B3250	YDDS/12Q3250	32-50	30-45 35-50	26
YDDS/09B4060	YDDS/09Q4060	40-60	40-60	26	YDDS/12B4060	YDDS/12Q4060	40-60	40-60	26
YDDS/09B5070	YDDS/09Q5070	50-70	50-70	26	YDDS/12B5070	YDDS/12Q5070	50-70	50-70	26
YDDS/09B6080	YDDS/09Q6080	60-80	60-80	26	YDDS/12B6080	YDDS/12Q6080	60-80	60-80	26
YDDS/09B7090	YDDS/09Q7090	70-90	70-90	26	YDDS/12B7090	YDDS/12Q7090	70-90	70-90	29
YDDS/09B80100	YDDS/09Q80100	80-100	80-100	26	YDDS/12B80100	YDDS/12Q80100	80-100	80-100	29
YDDS/09B90110	YDDS/09Q90110	90-110	90-110	26	YDDS/12B90110	YDDS/12Q90110	90-110	90-110	29
YDDS/09B100120	YDDS/09Q100120	100-120	100-120	26	YDDS/12B100120	YDDS/12Q100120	100-120	100-120	31
YDDS/09B110130	YDDS/09Q110130	110-130	110-130	26	YDDS/12B110130	YDDS/12Q110130	110-130	110-130	31
YDDS/09B120140	YDDS/09Q120140	120-140	120-140	26	YDDS/12B120140	YDDS/12Q120140	120-140	120-140	31
YDDS/09B130150	YDDS/09Q130150	130-150	130-150	26	YDDS/12B130150	YDDS/12Q130150	130-150	130-150	31
YDDS/09B140160	YDDS/09Q140160	140-160	140-160	26	YDDS/12B140160	YDDS/12Q140160	140-160	140-160	31



材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 Suggested Install Torque	注 Note
W1	Zinc Plated Steel	Zinc Plated Steel	Zinc Plated Steel	$\varnothing \leq 25$ 带宽 Band(9mm) 3.0Nm Band(12.7mm) 3.4Nm	⊕
W2	AISI SS201 SS304	AISI SS201 SS304	Zinc Plated Steel		
W4	AISISS304/SS201	AISISS304/SS201	AISISS304/SS201	$\varnothing \leq 25$ 带宽 Band(9mm) 3.0Nm Band(12.7mm) 3.4Nm	⊖
W5	AISISS316	AISISS316	AISISS316		

德式偏头喉箍
German Type Head Hose Clamp

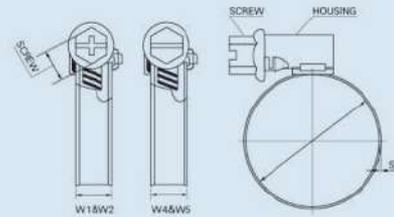

◎ 技术参数 / Technical Parameter


Dimension		货号 Item No.	
		YDDP9.0(带宽 Band Width 9.0mm)	YDDP12.0(带宽 Band Width 12.0mm)
8-12	5/16-1/2	YDDP0912	/
10-16	3/8-5/8	YDDP0916	/
12-20	1/2-3/4	YDDP0920	/
12-22	1/2-7/8	YDDP0922	/
16-25	5/8-1	YDDP0925	/
16-27	5/16-11/16	YDDP0927	YDDP1227
20-32	3/4-1 1/4	YDDP0932	YDDP1232
32-35	7/8-1 3/8	YDDP0935	YDDP1235
25-40	1-1 5/8	YDDP0940	YDDP1240
30-45	1 3/16-1 3/4	YDDP0945	YDDP1245
32-50	1 1/4-2	YDDP0950	YDDP1250
40-60	1 5/8-2 3/8	YDDP0960	YDDP1260
50-70	2-2 3/4	YDDP0970	YDDP1270
60-80	2 3/8-3 1/8	YDDP0980	YDDP1280
70-90	2 3/4-3 1/2	YDDP0990	YDDP1290
80-100	3 1/8-4	YDDP09100	YDDP12100
90-110	3 1/2-4 3/8	YDDP09110	YDDP12100
100-120	4-4 3/4	YDDP09120	YDDP12120
110-130	4 3/8-5 1/8	YDDP09130	YDDP12130
120-140	4 3/4-5 1/2	YDDP09140	YDDP12140
130-150	5 1/8-5 7/8	YDDP09150	YDDP12150
140-160	5 1/2-6 1/4	YDDP09160	YDDP12160
150-170	5 15/16-6-11/16	YDDP09170	YDDP12170
160-180	6 5/16-7 1/16	YDDP09180	YDDP12180
170-190	6 11/16-7 1/2	YDDP09190	YDDP12190
180-200	7 1/16-7 7/8	YDDP09200	YDDP12200
190-210	7 1/2-8 1/4	YDDP09210	YDDP12210
200-220	7 7/8-8 11/16	YDDP09220	YDDP12220

德式手柄
German Hose Clamp With Handle



可根据客户要求提供更多尺寸和材质。以上数据仅供参考
More size and material can be supplied according to customers requirements. Above data just for reference.

英式喉箍 British Hose Clamp

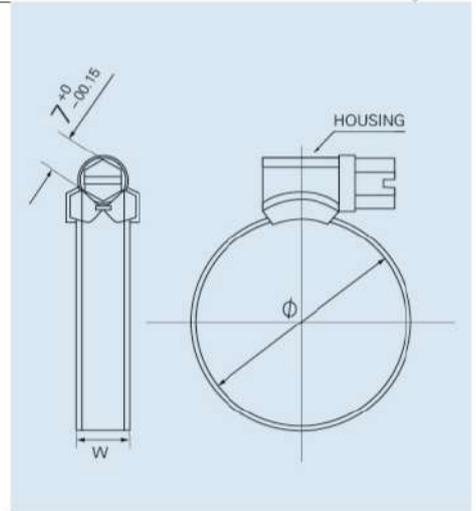

◎ 技术参数 / Technical Parameter

英式点焊喉箍 YDYS with welded Housing				英式钗头喉箍 YDYS with rivetd Housing				英式挂头喉箍 YDYS with Tube Housing			
编号 Part No.	规格 Size(inch)	规格 Size(mm)	带宽 Band with(mm)	编号 P art No.	规格 Size(inch)	规格 Size(mm)	带宽 Band with(mm)	规格 Size(inch)	规格 Size(mm)	带宽 Band with(mm)	
000	1/2	9-13	9.7	000	1/2	9-13	9.7	1/2	9-13	9.7	
MOO	5/8	13-16	9.7	MOO	5/8	13-16	9.7	5/8	13-16	9.7	
OO	3/4	13-19	9.7	OO	3/4	13-19	9.7	3/4	13-19	9.7	
O	7/8	16-22	9.7/11.7	O	7/8	16-22	9.7/11.7/12.7	7/8	16-22	9.7/11.7	
OX	1	19-25	9.7/11.7	OX	1	19-25	9.7/11.7/12.7	1	19-25	9.7/11.7	
1A	1 1/7	22-29	9.7/11.7	1A	1 1/7	22-29	9.7/11.7/12.7	1 1/7	22-29	9.7/11.7	
1	1 1/2	25-35	11.7	1	1 1/2	25-35	11.7/12.7	1 1/2	25-35	11.7	
IX	1 5/7	28-41	11.7	IX	1 5/7	28-41	11.7/12.7	1 5/7	28-41	11.7	
2A	2	31-48	11.7	2A	2	31-48	11.7/12.7	2	31-48	11.7	
2	2 1/4	38-54	11.7	2	2 1/4	38-54	11.7/12.7	2 1/4	38-54	11.7	
2X	2 1/2	44-60	11.7	2X	2 1/2	44-60	11.7/12.7	2 1/2	44-60	11.7	
20	2 3/4	50-70	11.7	20	2 3/4	50-70	11.7/12.7	2 3/4	50-70	11.7	
3×	3 1/7	60-80	11.7	3×	3 1/7	60-80	11.7/12.7	3 1/7	60-80	11.7	
4	3 1/2	70-90	11.7	4	3 1/2	70-90	11.7/12.7	3 1/2	70-90	11.7	
4X	3 8/9	80-102	11.7	4X	3 8/9	80-102	11.7/12.7	3 8/9	80-102	11.7	
5	4 1/3	95-115	11.7	5	4 1/3	95-115	11.7/12.7	4 1/3	95-115	11.7	
6	5 1/8	104-127	11.7	6	5 1/8	104-127	11.7/12.7	5 1/8	104-127	11.7	
6×	5 8/9	127-146	11.7	6×	5 8/9	127-146	11.7/12.7	5 8/9	127-146	11.7	
7	6 2/7	140-160	11.7	7	6 2/7	140-160	11.7/12.7	6 2/7	140-160	11.7	
7X	7 1/9	160-180	11.7	7X	7 1/9	160-180	11.7/12.7	7 1/9	160-180	11.7	
8	7 7/8	180-200	11.7	8	7 7/8	180-200	/	8 1/16	175-205	11.7	
/	9 1/9	210-230	11.7	/	9 1/9	210-230	/	9 2/16	200-231	11.7	
/	9 5/6	230-250	11.7	/	9 5/6	230-250	/	10 1/16	226-256	11.7	
/	11	260-280	11.7	/	11	260-280	/	11 2/16	251-282	11.7	

材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 Suggested Install Torque
W1	Zinc Plated Steel	Zinc Plated Steel	Zinc Plated Steel	$\varnothing \leq 29$ 3.0Nm $\varnothing \leq 40$ 4.8Nm $\varnothing \geq 44$ 5.2Nm
W2	SS201	SS201	Zinc Plated Steel	
W4	SS201	SS201	SS201	

英式喉箍
British Type Hose Clamp


英式卡箍组件
Hose Clamp Set



◎ 技术参数 / Technical Parameter

编号 Part No.	BEB09
带宽 Band Width	9mm
厚 Thickness	0.6mm
带长 Band Length	30m
蜗轮蜗杆头 Worm Head	As per buyer's option
材料 Material	SS430
最小订货量 MOQ	100rolls

英式释放卡箍
Quick Release Hose Clamp

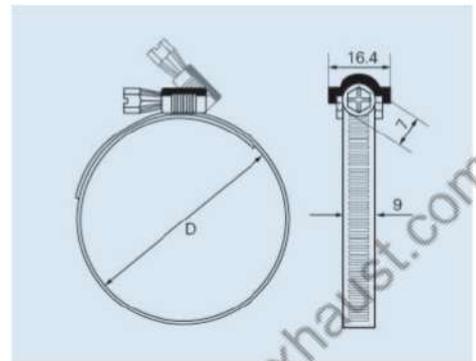

◎ 技术参数 / Technical Parameter

货号 Item No.YDYSSF9.0					
规格 Size(mm)	带宽 Width(mm)	规格 Size(mm)	带宽 Width(mm)	规格 Size(mm)	带宽 Width(mm)
25-100	9	25-250	9	25-500	9
25-125	9	25-275	9	25-550	9
25-150	9	25-300	9	25-600	9
25-175	9	25-350	9	25-650	9
25-200	9	25-400	9	25-700	9
25-225	9	25-450	9	25-750	9

材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 Suggested Install Torque
W1	Zinc Plated Steel	Zinc Plated Steel	Zinc Plated Steel	2.6N.m
W2	AISI SS430	Zinc Plated Steel	AISI SS430	

英式手柄卡箍
British Type Hose Clamp With Handle



可根据客户要求提供更多尺寸和材质。以上数据仅供参考
More size and material can be supplied according to customers requirements. Above data just for reference.

管束 Coupling



CHA 型管束
Type CHA Coupling

◎ 技术参数 / Technical Parameter

规格 Specification	只 / 箱 Pcs/carton	包装尺寸 Packing Size(cm)	重量 Weigh(kg)
2"	100	41*31*24	12
3"	100	56*41*26	15
4"	100	70*51*27	19
5"	50	49*33*53	15
6"	50	57*37*53	17
8"	20	45*45*32	30



B 型·耳板式卡箍
Type B Coupling



C 型·夹板式卡箍
Type C Coupling

◎ 技术参数 / Technical Parameter

规格 Specification	只 / 箱 Pcs/carton	包装尺寸 Packing Size(cm)	重量 Weigh(kg)
2"	100	41*31*24	12
3"	100	56*41*26	15
4"	100	70*51*27	19
5"	50	49*33*53	15
6"	50	57*37*53	17
8"	20	45*45*32	30

◎ 技术参数 / Technical Parameter

规格 Specification	只 / 箱 Pcs/carton	包装尺寸 Packing Size(cm)	重量 Weigh(kg)
2"	100	41*31*24	12
3"	100	56*41*26	15
4"	100	70*51*27	19
5"	50	49*33*53	15
6"	50	57*37*53	17
8"	20	45*45*32	30



F 型·高层卡箍
Type F Coupling



A 型·箍带式卡箍
Type A Coupling

◎ 技术参数 / Technical Parameter


规格 Specification	只 / 箱 Pcs/carton	包装尺寸 Packing Size(cm)	重量 Weigh(kg)
2"	100	37*29*32	23
3"	100	48*39*32	26
4"	100	70*49*31	33
5"	50	61*44*42	29
6"	50	71*49*42	31
8"	30	70*47*55	30
10"	10	55*28*54	22
12"	10	64*33*74	27
15"	10	80*40*74	37

◎ 技术参数 / Technical Parameter


规格 Specification	只 / 箱 Pcs/carton	包装尺寸 Packing Size(cm)	重量 Weigh(kg)
1.5"	100	33*24*32	12
2"	100	37*29*32	14
3"	100	48*39*32	18
4"	100	61*49*32	22
5"	50	58*49*41	23
6"	50	70*49*41	25
8"	30	67*46*53	21
10"	30	80*54*55	27
12"	16	65*65*57	30

管束、单 / 双卡式管道连接修补器 Coupling, single / double cassette piped patch


单 / 双卡式管道连接修补器 Single/Double Cassette Piped Patch



连接器安装步骤
Connector Installation Steps

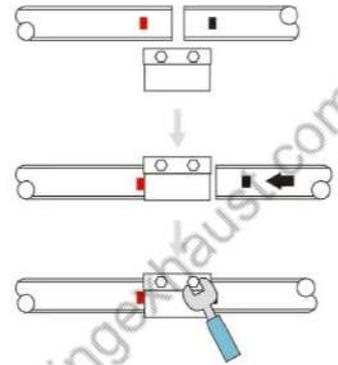

修补器安装步骤
Patch Installation Steps

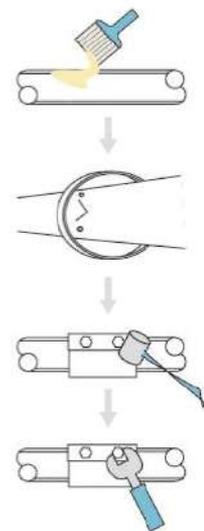

拆卸
Dismantle



外壳材质：
V1: AISI 304 不锈钢
V2: AISI 316L 不锈钢
V3: AISI 316Ti 不锈钢

Shell material:
V1: AISI 304 stainless steel
V2: AISI 316L stainless steel
V3: AISI 316Ti stainless steel

齿环抗拉



外壳材质：
V1: AISI 304 不锈钢
V2: AISI 316L 不锈钢
V3: AISI 316Ti 不锈钢

Shell material:
V1: AISI 304 stainless steel
V2: AISI 316L stainless steel
V3: AISI 316Ti stainless steel

双卡


密封圈材质：
EPDM: (适用介质: 水、空气、固体)
NBR: (适介质: 氨气、油、燃料、碳氢化物 5)
MVQ: (耐热耐化学腐蚀)

密封圈材质 Sealing ring material	适用材质 Applicable materials	适用温度 Applicable temperature
EPDM (三元乙丙橡胶)	水、废水、空气、粉尘和普通水蒸气 Water, waste water, air, dust and ordinary water vapor	-30°C ~+120°C
NBR(丁腈橡胶)	天然气、油、汽油及其他碳氧化合物 Natural gas, oil, gasoline and other carbon oxides	-30°C ~+100°C
SILICONE(硅橡胶)	耐暴晒、耐高温 Resistance to sunlight and high temperature	-70°C ~+260°C
Viton(氟橡胶)	耐热、耐化学腐蚀 Heat and chemical resistance	-95°C ~+300°C

可根据客户要求提供更多尺寸和材质。以上数据仅供参考

More size and material can be supplied according to customers requirements. Above data just for reference.

美式快速释放卡箍 Quick Release Hose Clamp

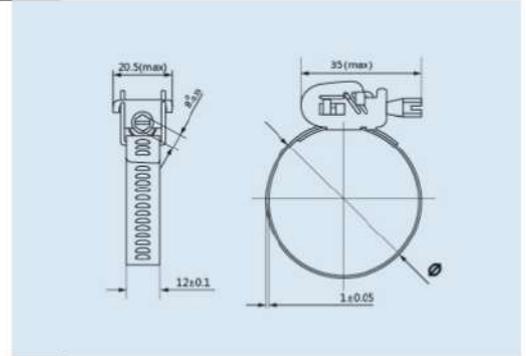

◎ 技术参数 / Technical Parameter

型号 Model	产品货号 Item No.	
SAE No.	YDMSSF12.7 (带宽 Bandwidth 12.7mm)	
	Inch	mm
12	1/2-1 1/4	13-32
20	3/4-1 3/4	19-44
24	1-2	26-51
28	1-2 1/4	26-57
36	1-2 3/4	26-70
48	1 1/2-3 1/2	38-89
56	1-4	26-101
72	2-5	51-127
88	2-6	51-152
104	2-7	51-178
116	1 3/4-7 3/4	45-197
128	4 1/4-8 1/2	108-216
136	1 3/4-9	45-228
152	2-10	51-254
188	2-12 1/4	51-311

美式卡箍组件 Hose Clamp Set



◎ 技术参数 / Technical Parameter

编号 Part No.	带宽 Band Width	厚 Thickness	长 Length	材料 Material	最小订货量 MOQ
AEB08	带宽 8mm	0.6mm	30m	SS201,SS304,SS316	100 rolls
AEB13	带宽 12.7mm	0.6mm	30m	SS201,SS304,SS316	100 rolls
AEH08	外壳 Housing 8mm			W2&W4/SS201,SS304	1000 rolls
AEH13	外壳 Housing 12.7mm			W2&W4/SS201,SS304	1000 rolls


可根据客户要求提供更多尺寸和材质。以上数据仅供参考

More size and material can be supplied according to customers requirements. Above data just for reference.


美式喉箍 American Hose Clamp



8mm钢带喉箍
8mm steel band clamp



12.7mm钢带喉箍
12.7mm steel band clamp

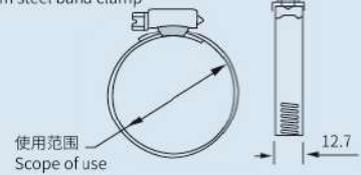

◎ 技术参数 / Technical Parameter


型号 Model	货号 Item No.			
SAE No.	YDMS8.0 (带宽 Bandwidth 8.0mm)		YDMS12.7 (带宽 Bandwidth 12.7mm)	
	Inch	mm	Inch	mm
04	3/8-5/8	10-16	3/8-5/8	10-16
05	1/2-3/4	13-19	1/2-3/4	13-19
06	1/2-7/8	12-22	5/8-7/8	16-23
08	5/8-1	16-25	3/4-1 1/16	19-27
10	3/4-1 1/16	19-29	5/8-1 1/4	16-32
12	7/8-1 1/4	22-32	3/4-1 1/2	19-38
16	1-1 1/2	25-38	3/4-1 3/4	19-44
20	1 1/4-1 3/4	32-44	1 1/4-2	32-51
24	1 3/8-2	35-51	1 1/2-2 1/4	38-57
28	1 1/2-2 1/4	38-57	1 9/16-2 1/2	40-64
32	1 1/2-2 3/8	35-60	1 13/16-2 3/4	46-70
36	1 3/4-2 1/2	44-64	2 1/4-3	57-76
40	2-2 3/4	51-70	2 5/8-3 1/4	67-83
44	2 3/4-3 1/4	64-76	2 9/16-3 1/2	65-89
48	2 13/16-3 1/2	70-89	2 13/16-3 3/4	72-95
52	2 13/16-3 3/4	72-95	3 1/16-4	78-101
56	3 1/16-4	78-101	3 5/16-4 1/4	84-108
60	/	/	3 9/16-4 1/2	91-114
64	/	/	4 1/8-5	105-127
72	/	/	4 5/8-5 1/2	117-140
80	/	/	5 1/8-6	105-152
88	/	/	5 9/16-6 1/2	114-165
96	/	/	6 1/8-7	156-178
104	/	/	7-8	177-203
116	/	/	8-9	203-228
120	/	/	9-10	228-254

材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 Suggested Install Torque
W1	Zinc Plated Steel	Zinc Plated Steel	Zinc Plated Steel	Band (8mm)--2.1Nm Band (12.7mm)--3.8Nm
W2	AISI SS201/SS304	AISI SS201/SS304	Zinc Plated Steel	
W2B	AISI SS201	Zinc Plated Steel	Zinc Plated Steel	
W4	AISI SS201/SS304	AISI SS201/SS304	AISI SS201/SS304	
W5	AISI SS316	AISI SS316	AISI SS316	

美式重型恒定压力卡箍 Constant Tension Clamp



Spring and clamp construction is built to respond to constant temperature fluctuations. The Large, the heavier-gauge, precision-formed springs provide higher rates of band tension and adjustment for a more dependable seal. Inner liner protects against shearing of the hose surfaces.

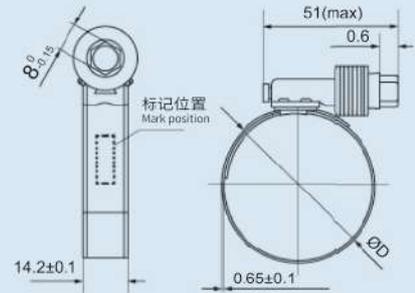

◎ 技术参数 / Technical Parameter


型号 Model	YDZX15.8(带宽 Bandwidth 15.8mm)		
SAE	Inch		mm
175	1-1 3/4		25-45
212	1 1/4-2 1/8		32-54
262	1 3/4-2 5/8		45-66
312	2 1/4-3 1/8		57-79
362	2 3/4-3 5/8		70-92
412	3 1/4-4 1/8		83-105
462	3 3/4-4 5/8		95-117
512	4 1/4-5 1/8		108-130
562	4 3/4-5 5/8		121-143
612	5 1/4-6 1/8		133-155
662	5 3/4-6 5/8		146-168
712	6 1/4-7 1/8		159-181
762	6 3/4-7 5/8		172-193
812	7 1/4-8 1/8		184-206
862	7 3/4-8 5/8		197-219
912	8 1/4-9 1/8		210-232

材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	垫圈 Washers	建议安装扭力 Suggested Install Torque
W2	AISI SS201/SS304	AISI SS201/SS304	Zinc Plated Steel	AISISS410	11 N.m
W4	AISI SS201/SS304	AISI SS201/SS304	AISI SS201/SS304	AISISS410	

美式手柄系列 American hose clamp with handle



美式扣盖喉箍
Power-Gear Hose Clamp

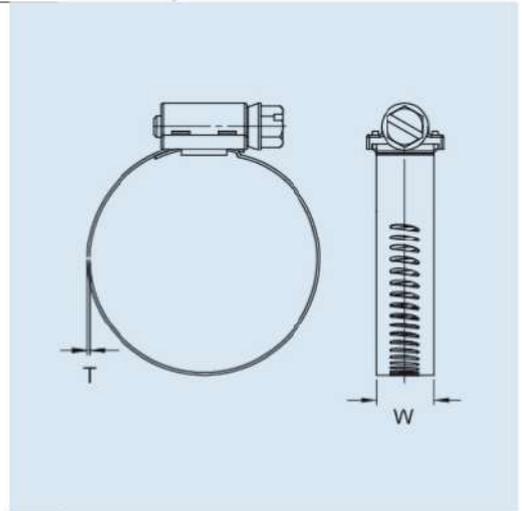

◎ 技术参数 / Technical Parameter

型号 Model	产品货号 Item No.					
SAE No.	YDMS12.5 (带宽 Bandwidth 12.5mm)		YDMS14.2 (带宽 Bandwidth 14.2mm)		YDMS15.8 (带宽 Bandwidth 15.8mm)	
	Inch	mm	Inch	mm	Size	Inch mm
06	7/16-3/4	11-20	/	/	175	1-1 3/4 25-45
08	1/2-15/16	13-23	/	/	212	1 1/4-2 1/8 32-54
10	9/16-1 1/16	14-27	9/16-1 1/16	14-27	262	1 3/4-2 5/8 45-66
12	11/16-1 1/4	18-32	11/16-1 1/4	18-32	312	2 1/4-3 1/8 57-79
16	13/16-1 1/2	21-38	13/16-1 1/2	21-38	362	2 3/4-3 5/8 70-92
20	13/16-1 3/4	21-44	13/16-1 3/4	21-44	412	3 1/4-4 1/8 83-105
24	1 1/16-2	27-51	1 1/16-2	27-51	462	3 3/4-4 5/8 95-117
28	1 5/16-2 1/4	33-57	1 5/16-2 1/4	33-57	512	4 1/4-5 1/8 108-130
32	1 9/16-2 1/2	40-64	1 9/16-2 1/2	40-64	562	4 3/4-5 5/8 121-143
36	1 13/16-2 3/4	46-70	1 13/16-2 3/4	46-70	612	5 1/4-6 1/8 133-155
40	2 1/16-3	52-76	2 1/16-3	52-76	662	5 3/4-6 5/8 146-168
44	2 5/16-3 1/4	59-83	2 5/16-3 1/4	59-83	712	6 1/4-7 1/8 159-181
48	2 9/16-3 1/2	65-89	2 9/16-3 1/2	65-89	762	6 3/4-7 5/8 172-193
52	2 13/16-3 3/4	71-95	2 13/16-3 3/4	71-95	812	7 1/4-8 1/8 184-206
56	3 1/16-4	78-102	3 1/16-4	78-102	862	7 3/4-8 5/8 197-219
60	3 5/16-4 1/4	84-108	3 5/16-4 1/4	84-108	912	8 1/4-9 1/8 210-232
64	3 9/16-4 1/2	90-114	3 9/16-4 1/2	90-114	/	/ /
72	4 1/16-5	103-127	4 1/16-5	103-127	/	/ /
80	4 5/8-5 1/2	117-140	4 5/8-5 1/2	117-140	/	/ /
88	5 1/8-6	130-152	5 1/8-6	130-152	/	/ /
96	5 9/16-6 1/2	141-165	5 9/16-6 1/2	141-165	/	/ /

材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 Suggested Install Torque
W1	Zinc Plated Steel	Zinc Plated Steel	Zinc Plated Steel	LTKG12.5-5.3Nm
W2	AISISS201/SS203	AISI SS201/SS203	Zinc Plated Steel	LTKG 14.2-7.5 Nm
W4	AISI SS201/SS304	AISI SS201/SS304	AISI SS201/SS304	LTKG15.8-UNm

可根据客户要求提供更多尺寸和材质。以上数据仅供参考

More size and material can be supplied according to customers requirements. Above data just for reference.